

4 ARMADI SPECIALI



BREAK 455 S



Centralina elettronica
Electronic control unit
Central électronique
Elektronisches Steuergehäuse
Centralita electrónica

Scocca interna ed esterna in lamiera bianca atossica / Outside and inside body made of atoxic white plate / Construction intérieure et extérieure en tôle blanche atoxique / Innen- und Außenaufbau aus weissem unschädlichem Blech / Construcción interna y externa de chapa blanca no tóxica

Porta con molla di ritorno
Door with return spring
Porte avec ressort de retour
Tür mit Rückzugsfeder
Puerta con muelle de retorno
























Porta con guarnizione magnetica intercambiabile / Door with interchangeable magnetic strips / Porte avec joint magnétique interchangeable / Tür mit magnetischer austauschbarer Dichtung / Puerta con burlete magnético intercambiable

Maniglia porta su tutta l'altezza della porta e incassata / Door handle from top to bottom of the door and embedded / Poignée de la porte sur toute la hauteur de la porte et encastrée / Schubladenfach aus rostfreiem Stahl für alle Modelle / Tirador de la puerta montado en toda la altura de la puerta y encajado

Cassetiera in acc. inox per tutti i modelli / Chest of drawers in stainless steel for all models / Tiroirs en acier inoxydable pour tous les modèles / Türe des Schubladenfachs mit serienmäßigen / Cajonero de acero inoxidable para todos modelos

Spessore isolamento 50 mm
50 mm insulation thickness
Épaisseur de l'isolant 50 mm
Isolierungsdicke 50 mm
Esporisor aislamiento 50 mm



		 °C	 Watt	 Lt.	 DEFROST	 H ₂ O				 mm. (LxPxH)	 Kg.	
BREAK 222 S/L	 	+3/+8	210	85		AUT		230v/1/50Hz	R 134a	645x638x805	39	-
BREAK 400 S/L	 	+3/+8	850	384		AUT		230v/1/50Hz	R 404a	665x625x1923	130	-
BREAK 600 S/L	 	+3/+8	850	508		AUT		230v/1/50Hz	R 404a	715x725x1923	150	-

Dati di collaudo • Test details • Détails d'essai • Prüfungsergebnisse • Datos de ensayo • MAX = (30°C - % U.R. 55)



Prezzi vedi LISTINO a pagina
See PRICE LIST on page

58-59

BREAK 222 S



Colori standard
Standard colors


COD. 09

BREAK 222 S/L




Porte della cassetiera con serrature di serie e passe-partout
Chest of drawers doors with current locks and master-key
Porte des tiroirs avec serrure de série et clé passe-partout
Schlössen und Hauptschlüssel
Puerta de la cajonera con cerradura corriente y llave maestra




BREAK 444 S/L



BREAK 455 S/L




BREAK 466 S/L

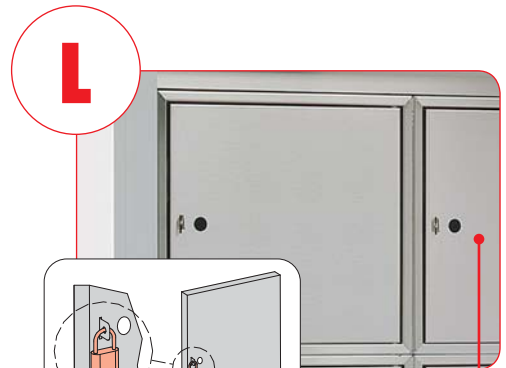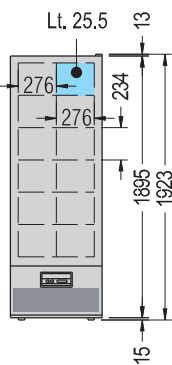


Predisposizione chiusura con lucchetti (lucchetti non forniti)
Arranged for closing with locks (locks not supplied)
Prévu pour fermeture avec cadenas (le cadenas n'est pas fourni)
Voreinstellung für Vorhängeschloss-Schließung (Vorhängeschloss gehört nicht zum Lieferumfang)
Predisposición cierre con candados (candados no incluido en el equipamiento base)

BREAK 644 S/L



BREAK 655 S/L



BREAK 666 S/L

